


ARC CNC TEKNOLOJİLERİ

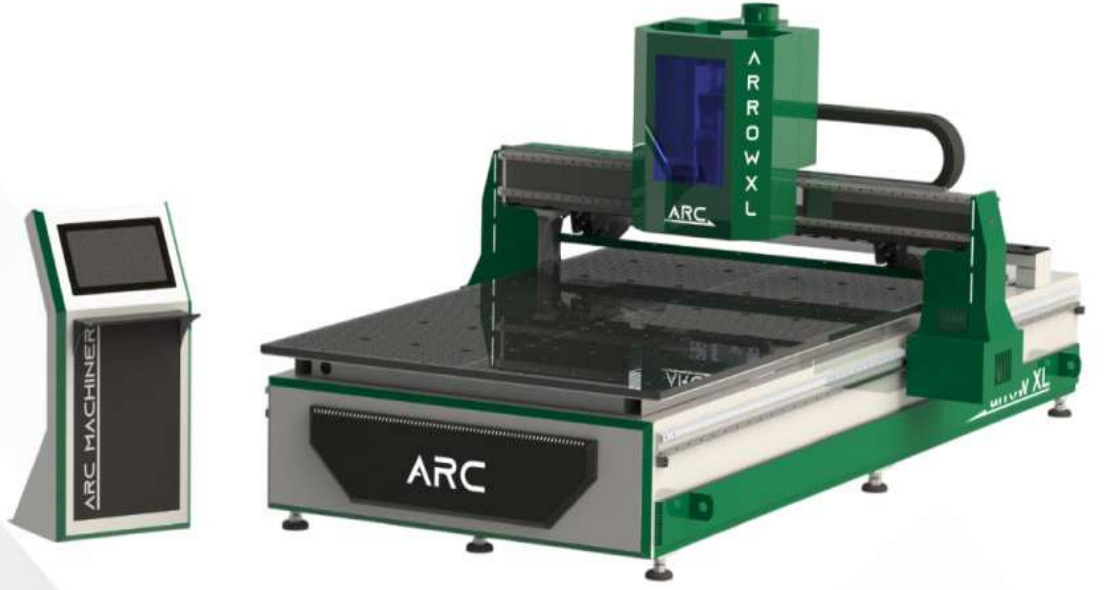

Her Detayda
Mükemmellik

Teknik Özellikler - Technical Specifications

TEKNİK ÖZELLİKLER	MARKA	TECHNICAL SPECIFICATIONS	BRAND
KONTROL ÜNİTESİ 19" İNÇ	arcSoft	CONTROL UNIT 19" INCH	acrSoft
X - Y SERVO MOTOR 1.5 KW	DELTA	X - Y SERVO MOTOR 1.5 KW	DELTA
Z SERVO MOTOR 1.0 KW FRENLİ	DELTA	Z SERVO MOTOR 1.0 KW WITH BRAKE	DELTA
İŞLEME MOTORU 11 KW 24.000 DEVİR	11 Kw HITECO	PROCESSING ENGINE 11 KW 24,000 RPM	11 KW HITECO
VAKUM POMPASI 250 M3 KURU TİP	250 M3 EUROVAC	VACUUM PUMP 250 M3 DRY TYPE	BLOWER 510 M3
VAKUM TABLA SİSTEMİ	6 BÖLGE	VACUUM TABLE SYSTEM	6 BÖLGE
VAKUM TABLA ZEMİN 18mm COMPACT	ASD / GENTAŞ	VACUUM TABLE FLOOR 18mm COMPACT	ASD / GENTAŞ
REDÜKTÖR 120 1/10 GÖVDE	LIMING	REDUCER 120 1/10 BODY	LIMING
KRAMİYERDİŞLİ HAREKET GRUBU 30x30 MOD2 HELİSEL	STAF	KRAMIRE GEAR MOTION GROUP 30x30 MOD2 HELICAL	STAF
PİNYONDİŞLİ HAREKET GRUBU Z32 MOD2 HELİSEL	STAF	PINION GEAR MOTION GROUP Z32 MOD2 HELICAL	STAF
LINEAR HAREKET GRUBU X EKSENİ GENİŞ TİP G3 25	STAF	LINEAR MOTION GROUP X AXIS LARGE TYPE G3 25	STAF
LINEAR HAREKET GRUBU Z EKSENİ GENİŞ TİP G3 25	STAF	LINEAR MOTION GROUP Z AXIS LARGE TYPE G3 25	STAF
LINEAR HAREKET GRUBU Y EKSENİ GENİŞ TİP G3 35	STAF	LINEAR MOTION GROUP Y AXIS LARGE TYPE G3 35	STAF
VİDALI MİL HAREKET GRUBU 25 X 500	GTEN	BALL SCREW MOVEMENT GROUP 25 X 500	GTEN
YAĞLAMA ÜNİTESİ OTOMATİK 2 LT	ILC	LUBRICATION UNIT AUTOMATIC 2 LT	ILC
CAD/CAM YAZILIM	-	CAD/CAM SOFTWARE	-
TAKIM SIFIRLAMA SWITCH SİSTEM	TELEMECANIQUE	TOOL RESET SWITCH SYSTEM	TELEMECANIQUE
TAKIM DEĞİŞTİRME	12 ADET	TOOL CHANGE 12 PIECES ROTARY MAGAZINE	-
ÇALIŞMA ALANI	2100*3660*Z300	WORK AREA	2100*3660*Z300
HAVA GEREKSİNİMİ	8 BAR	AIR REQUIREMENT	8 BAR
ENERJİ TÜKETİMİ	23 KW	ENERGY CONSUMPTION	23 KW
MAKİNE AĞIRLIĞI	4000 KG	MACHINE WEIGHT	4000 KG
STANDART PAKET ÖLÇÜLERİ	E:2300*B:5300*Y:2600	STANDARD PACKAGE DIMENSIONS	E:2300*B:5300*Y:2600
GARANTİ SÜRESİ	2 YIL KOŞULSUZ	WARRANTY PERIOD	2 YEARS UNCONDITIONAL

MAKİNE TEKNİK ÇİZİMİ

